




<u>Phone</u>: **1–877-320-3599** <u>Fax</u>: 503.665.2929 <u>www.rplusdoors.com</u>

Job Number:	
Job Name:	
Date:	
Quantity:	

## **Horizontal Electric Sliding Door (Left Slide)**

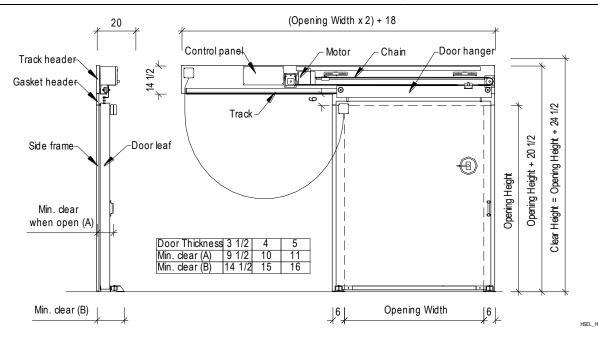

Net Opening Width: Height:	Door Type Cooler Freeze Temperati	er	Door Panel Thickness: 3 ½" 4" 5"	Exterior Finish / Kickplates Smooth Stucco Steel Galvanized Steel White	Interior Finish / Kickplates Smooth Stucco Steel Galvanized Steel White Aluminum
Options  Lock Hasp w/ Safety Rel Breaker Handle Heated Threshold Double Frame & Header Return Jambs Wall Thickness: View Window (in wicket of Non-Heated Heated		1 ph 60Hz 60Hz 60Hz 60Hz 60Hz 60Hz 60Hz 60Hz	220V  460V 3 ph 50 Hz al Pull Cords (2 standard) d (operates 1 door) al (operates up to 4 doors)	Aluminum White Stainless Steel* Galvanneal* Other Rigidized Aluminum Diamond Tread Galvanized smooth only	Aluminum White Stainless Steel* Galvanneal* Other Rigidized Aluminum Diamond Tread Galvanized smooth only

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgment forms are signed and returned.

Specifications Accepted by:	 Date:	
openious receptor by:		130/18a - HSEL HORIO5 doc