




<u>Phone</u>: **1–877-320-3599** <u>Fax</u>: 503.665.2929 <u>www.rplusdoors.com</u>

Reach-In Door w/ Flat Frame w/ 4-Sided Lap (Right Hinge)

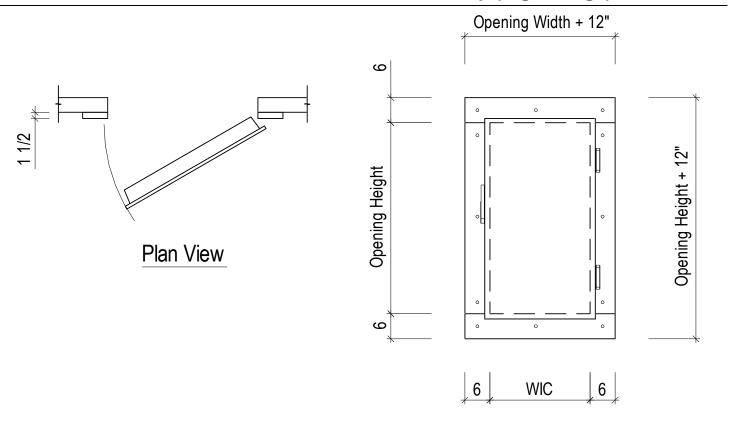

Net Opening:	Application:	Gasket:	Exterior Finish	Interior Finish
Width:	Cooler	□ D-Shape	Stucco Galv.	Stucco Galv.
Height:	☐ Freezer		Stucco White.	Stucco White.
	3-Sided Heat Cable		Stucco Aluminum.	Stucco Aluminum.
	4-Sided Heat Cable	_	Stucco White Alum.	Stucco White Alum.
	Temperature:ºl	-	Smooth Galv.	Smooth Galv.
Hardware:	Option	ns	Smooth White	Smooth White
() Hinges _	Do	ouble Frame & Header	Smooth Aluminum	Smooth Aluminum
Latch/Strike	Re	eturn Jamb	Smooth White Alum.	Smooth White Alum.
Inside Release	V	Vall Thickness:	_ Stainless Steel	Stainless Steel
Closer	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	ew Window	☐ Galvaneal	☐ Galvaneal
Cylinder Lock		Non-Heated	Other	Other
Locking Bar		Heated		
			_ Kickplates	
			Aluminum Diamond Tread	Aluminum Diamond Tread
			☐ Galvanized	☐ Galvanized
			LJ	□

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgment forms are signed and returned.

Specifications Accepted by:

Date:

030204a - FlatFrame_ReachIn_RH_4SideLap.doc