


*WIC - Width in clear from inside chamber
 **Rough Width Opening - Width of opening from outside of chamber
 It is critical that we get the opening size (interior, exterior and wall thickness), not just door measurements.

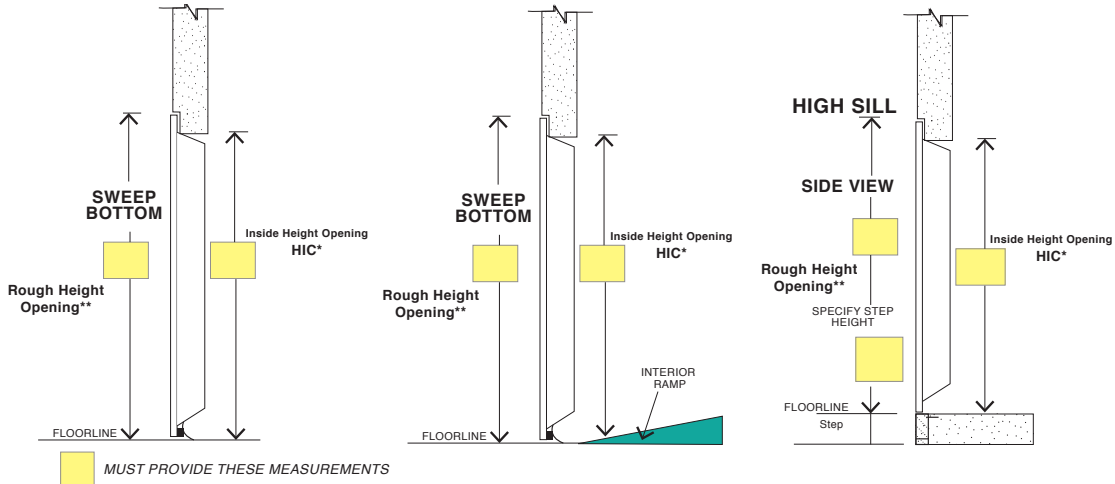

*HIC - Height in clear from inside chamber
 **Rough Height Opening - Height of opening from outside of chamber
 It is critical that we get the opening size (interior, exterior and wall thickness), not just door measurements.

STEPS FOR ORDERING YOUR DOOR AND FRAME – Check all that apply or fill in the measurements

Rough Opening (Exterior): Width _____ Height _____
 (Outside of Chamber)

WIC (Interior): Width _____ **HIC(Interior)** Height _____
 (Inside of Chamber)

FEATURES:

- Cooler Freezer
- Temperature _____ F
- Threshold

Exterior:

- Smooth: White SS Galvanized
- Stucco: Galvalume White
- Aluminum Other _____

Interior:

- Smooth: White SS Galvanized
- Stucco: Galvalume White
- Aluminum Other _____

Special Finish Options Available - Contact factory with your request

HARDWARE: (Standard Frame Door)

- Hinges placed on Left Right
- Spring Assist Closure or Gravity/Cam Closure

Latch & Strike

- Inside Release Closer
- Cyl. Lock
- Panic Hardware (Contact factory for pricing/info)

OPTIONS:

- Self-Closing Package (Contact factory for pricing/info)
- Double Frames
- Kickplate:
 - Exterior: Alum. SS Galvanized
 - Interior: Alum. SS Galvanized
- View Window:
 - Non-Heated Heated
 - 14 X 14 14 X 14
 - 14 X 24 14 X 24

CONTACT INFORMATION

Company _____	
Name _____	Sales Rep _____
Phone _____	Email _____