

	Phone
28.86	
Sec. All	WV
■ 2 307 06 2	

Ē

one: 1-877-320-3599
Fax: 503.665.2929
www.rplusdoors.com


Job	Number:

Job Name: _____

Date:

Quantity:

Vertical Electric Full Lift w/ Personnel Door (Right Hinge)

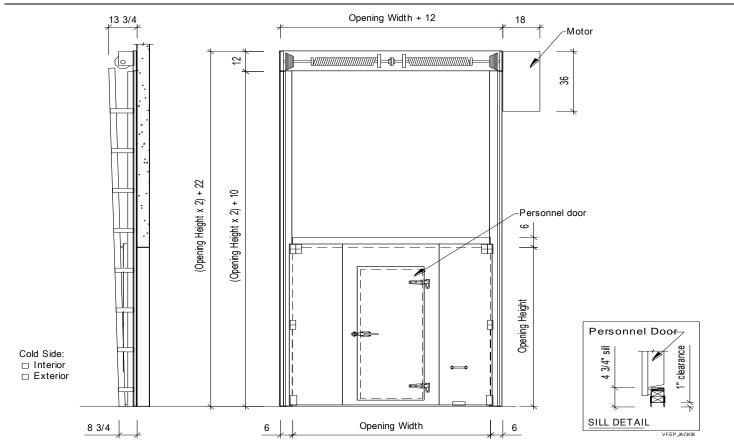

Notes: Standard slide lock included (field installed). If door is mounted on outside of room, then an alternate safety exit is required. Power cut-off switch provided on electric doors.

Net Opening Width: Height:	Cooler	or Panel Thickness: 3 ½" 4" 5"	Exterior Finish Smooth Stucco Steel Galvanized Steel White	Interior Finish Smooth Stucco Steel Galvanized Steel White
Options	Electric Operator	Wicket Door	Aluminum	Aluminum
 Double Frame & Header Return Jambs Wall Thickness: View Window Non-Heated Heated Corrosion Resistant Pkg Track Hood 	□208V □220V □460V □1 ph □3 ph □60Hz □50 Hz Additional Pull Cords (2 std) Radio Set: □Standard (operates 1 door) □Industrial (operates up to 4 drs □Magnetic Loop □Microwave Sensor	Width:	Aluminum White Stainless steel* Galvanneal* Giter Rigidized Kickplates (Swg/ Sld) Galvanized Galvanized *smooth only	Aluminum White Stainless Steel* Galvanneal* Gitenneal* Rigidized Kickplates (Swg/ Sld) Aluminum Diamond Tread Galvanized

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgment forms are signed and returned.

_