




Phone: 1-877-320-3599 Fax: 503.665.2929 www.rplusdoors.com

Job Number:	
Job Name:	
Date:	
Quantity:	

Vertical Electric Full Lift Door

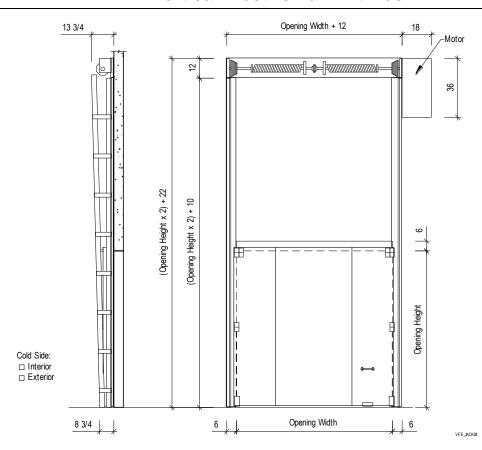

Notes: Standard slide lock included (field installed). If door is mounted on outside of room, then an alternate safety exit is required. Power cut-off switch provided on electric doors.

Net Opening Width: Height: Clear Height:	Door Type Cooler Freeze Temperatu	r	Door Panel Thickness: 3 ½" 4" 5"	Exterior Finish Smooth Stucco Steel Galvanized Steel White	Interior Finish ☐ Smooth ☐ Stucco ☐ Steel Galvanized ☐ Steel White
Options Lock Hasp w/ Safety Rel (If track is mounted on outsic safety release mechanism is Double Frame & Header Return Jambs Wall Thickness: View Window Non-Heated Heated	le of room, supplied)	☐1 ph ☐60Hz ☐ Addition Radio Set: ☐Standa	220V 460V 3 ph 50 Hz nal Pull Cords (2 standard) rd (operates 1 door) ial (operates up to 4 doors)	Aluminum	Aluminum Aluminum White Stainless Steel* Galvanneal* Other Rigidized Kickplates Aluminum Diamond Tread Galvanized *smooth only

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgment forms are signed and returned.

Specifications Accepted by:	Date:	
opositione / tecepton by:		130418a - VFE.doc