




Phone: 1–877-320-3599 Fax: 503.665.2929 www.rplusdoors.com

Job Number:	
Job Name:	
Date:	
Quantity:	

Vertical Electric High Lift

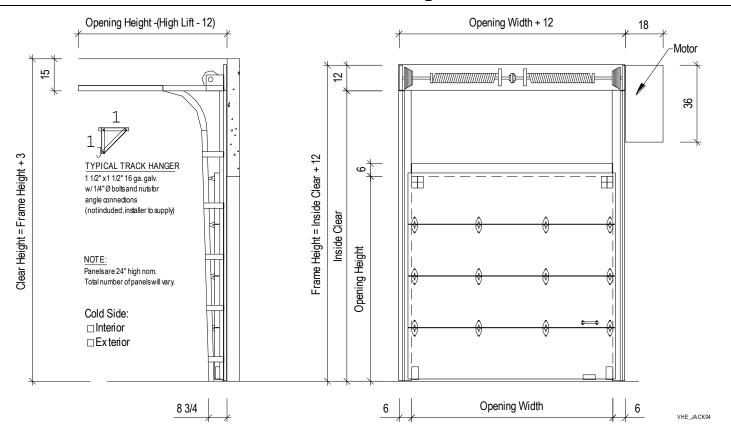

Notes: Standard slide lock included (field installed). If door is mounted on outside of room, then an alternate safety exit is required. Power cut-off switch provided on electric doors.

Tower cat-on switch provided on electric doors.							
Net Opening Width: Height:	Door Type Cooler Freeze Temperatu	er	Door Panel Thickness: 3 ½" 4" 5"	Exterior Finish Smooth Stucco Steel Galvanized Steel White Aluminum	Interior Finish ☐ Smooth ☐ Stucco ☐ Steel Galvanized ☐ Steel White ☐ Aluminum		
Options Double Frame & Hee Return Jambs Wall Thickness: View Window Non-Heated Heated Corrosion Resistant Track Hood		1 ph 60Hz 60Hz 60Hz 60Hz 60Hz 60Hz 60Hz 60Hz	220V 460V 3 ph 50 Hz al Pull Cords (2 standard) d (operates 1 door) al (operates up to 4 doors)	Aluminum White Stainless Steel* Galvanneal* Other Rigidized Aluminum Diamond Tread Galvanized Salvanized *smooth only	Aluminum White Stainless Steel* Galvanneal* Other Rigidized Aluminum Diamond Tread Galvanized *smooth only		

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgment forms are signed and returned.

Specifications Accepted by:	Da	Date:	
-p			130418a - VHE doc